




## \*\*\*WARNING\*\*\*

BEFORE USING THIS MULTI-TOOL ON YOUR FIREARM, YOU MUST FIRST INSURE THAT YOU HAVE COMPLETELY UNLOADED THE FIREARM BY REMOVING THE MAGAZINE AND SETTING IT ASIDE, THEN CHECKING THE CHAMBER. ONCE YOUR FIREARM IS FREE AND CLEAR OF ALL ROUNDS, YOU MAY PROCEED WITH DISASSEMBLY OF YOUR FIREARM.

### RETRACTING KNIFE BLADE W/LINERLOCK SAFETY

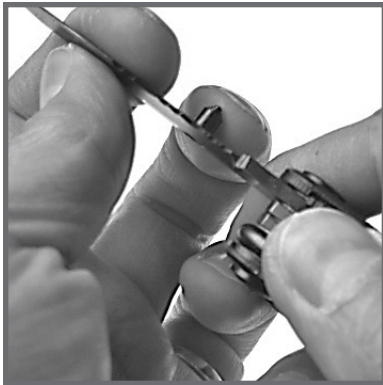


PUSH LINERLOCK SAFETY TAB TO THE RIGHT TO DISENGAGE THE LOCK, THEN BEGIN TO RETRACT BLADE SLOWLY.



MAKE SURE TO MOVE YOUR THUMB OUT OF THE WAY BEFORE CONTINUING TO ROTATE BLADE BACK INTO THE TOOL.

### BARREL BUSHING WRENCH

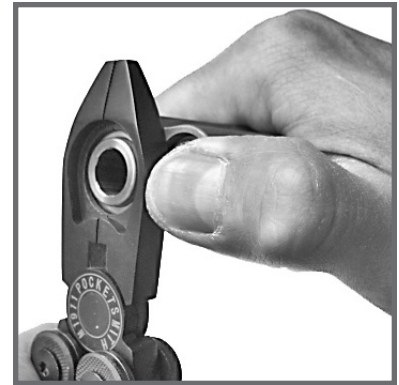

THE PLUG FOR THE RECOIL SPRING IS HELD UNDER TENSION; HOLD IT IN PLACE W/YOUR THUMB WHILE ROTATING THE BARREL BUSHING.

**KEEP OUT OF THE REACH OF CHILDREN.**